




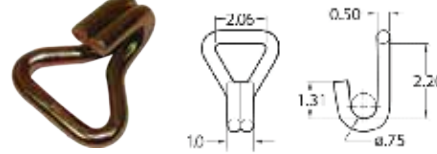
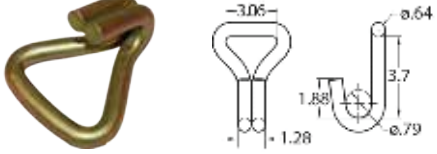
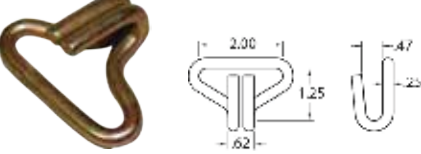
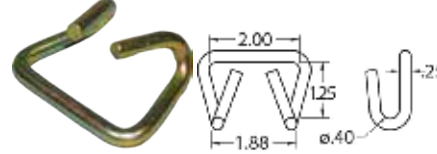
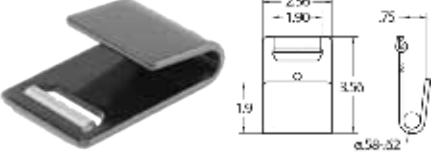
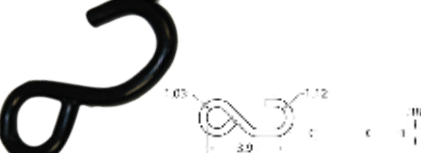


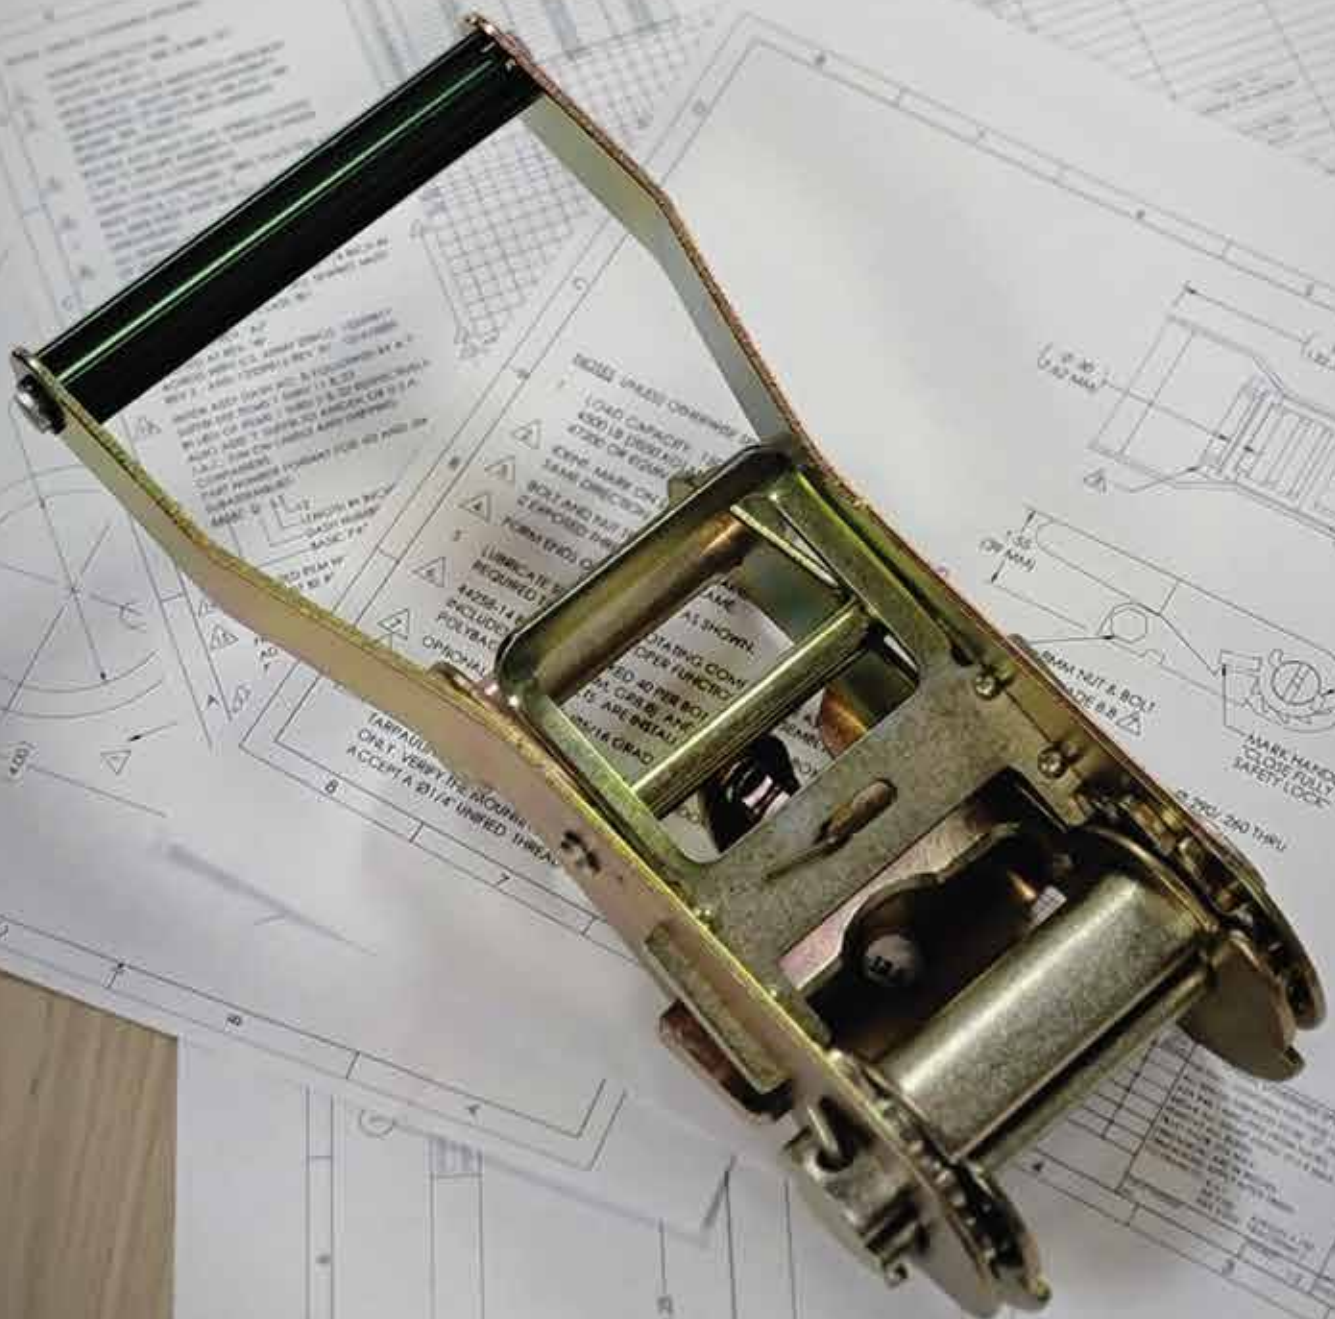
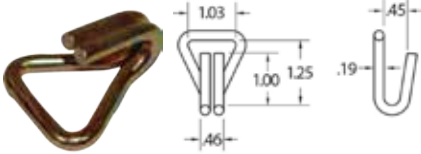
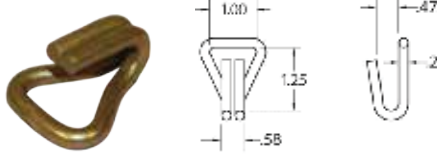


HOOKS, BUCKLES & WEBBING

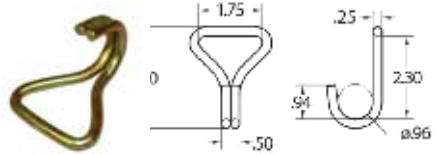


HOOKS

<p>40316-12 1^{IN} Narrow Wire Hook <ul style="list-style-type: none"> • 166 lbs WLL (75 kg) • Heat treated • Corrosion resistant plating </p> 	<p>40024-10 1^{IN} Narrow Wire Hook <ul style="list-style-type: none"> • 1,000 lbs WLL (454 kg) • Heat treated • Corrosion resistant plating </p> 	<p>43120-19 1-3/4^{IN} Narrow Wire Hook <ul style="list-style-type: none"> • 500 lbs WLL (227 kg) • Heat treated • Corrosion resistant plating </p> 
<p>43120-11 2^{IN} Narrow Wire Hook <ul style="list-style-type: none"> • 1,666 lbs WLL (757 kg) • Heat treated • Corrosion resistant plating </p> 	<p>43120-13 2^{IN} Narrow Wire Hook <ul style="list-style-type: none"> • 3,333 lbs WLL (1,515 kg) • Heat treated • Corrosion resistant plating </p> 	<p>43120-20 3^{IN} Narrow Wire Hook <ul style="list-style-type: none"> • 7,333 lbs WLL (3,333 kg) • Heat treated • Corrosion resistant plating </p> 
<p>40024-12 2^{IN} Narrow Wire Hook <ul style="list-style-type: none"> • 833 lbs WLL (378 kg) • Heat treated • Corrosion resistant plating </p> 	<p>40023-12 2^{IN} Wide Wire Hook <ul style="list-style-type: none"> • 833 lbs WLL (378 kg) • Heat treated • Corrosion resistant plating </p> 	<p>40891-18 2^{IN} Flat Hook <ul style="list-style-type: none"> • 3,333 lbs WLL (1,515 kg) • Heat treated • Corrosion resistant plating </p> 
<p>41313-13 1^{IN} Vinyl S-Hook <ul style="list-style-type: none"> • 400 lbs WLL (181 kg) • Heat treated </p> 	<p>41313-19 1^{IN} Vinyl S-Hook <ul style="list-style-type: none"> • 600 lbs WLL (272 kg) • Heat treated </p> 	<p>43546-10 1^{IN} Gutter Hook <ul style="list-style-type: none"> • 250 lbs WLL (113 kg) • Heat treated • Corrosion resistant plating </p> 
<p>40065-10 1^{IN} Plated Flat Hook <ul style="list-style-type: none"> • 333 lbs WLL (151 kg) • Heat treated • Corrosion resistant plating </p> 	<p>40065-12 1^{IN} Vinyl Flat Hook <ul style="list-style-type: none"> • 333 lbs WLL (151 kg) • Heat treated • Corrosion resistant plating </p> 	<p>40044-10 1^{IN} Flat Hook w/Keeper <ul style="list-style-type: none"> • 1,166 lbs WLL (530 kg) • Heat treated • Corrosion resistant plating </p> 

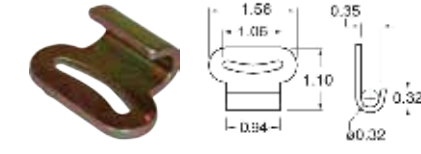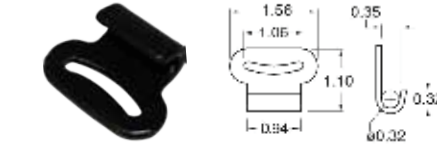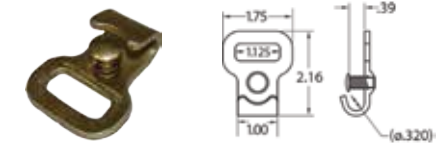
BUCKLES

Ratchet Buckles


43320-32
1" Ratchet Buckle
1,466 lbs WLL (666 kg)

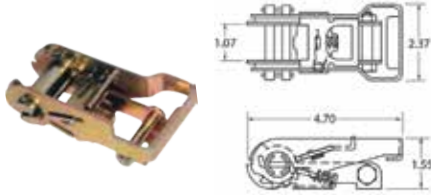


48770-10
1" Ratchet Buckle
500 lbs WLL (227 kg)
• Low profile
• Black powder coat

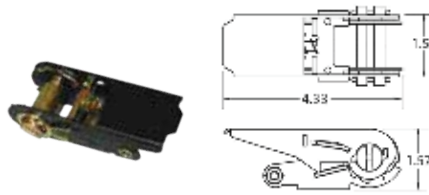


44232-10
1" Ratchet Buckle
400 lbs WLL (181 kg)

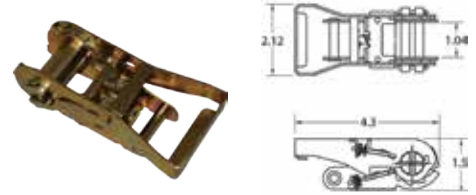


41808-14
1-3/4" Ratchet Buckle
2,000 lbs WLL (908 kg)
• Hook end

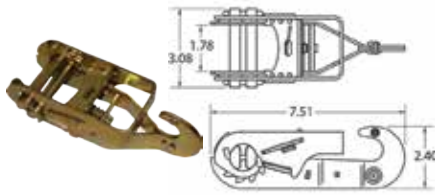


49715-10
2" Ratchet Buckle
1,500 lbs WLL (680 kg)
• Long wide handle torque limiting

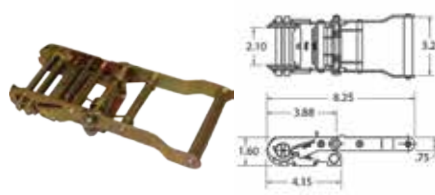


44258-13
2" Ratchet Buckle
1,500 lbs WLL (680 kg)
• Low profile

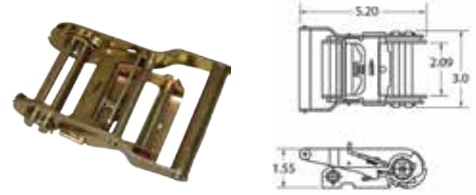


44627-11
2" Ratchet Buckle
3,333 lbs WLL (1,515 kg)
• Standard handle

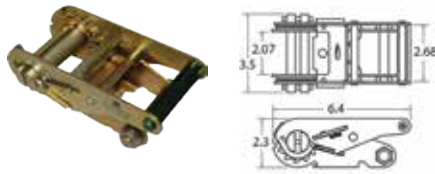


44587-10
2" Ratchet Buckle
3,666 lbs WLL (1,666 kg)
• Long wide handle

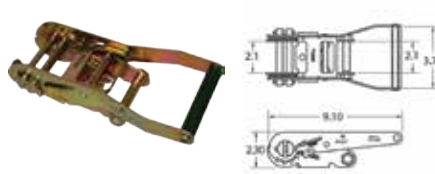


50037-10
2" Ratchet Buckle w/Keeper
3,666 lbs WLL (1,666 kg)
• Long wide handle

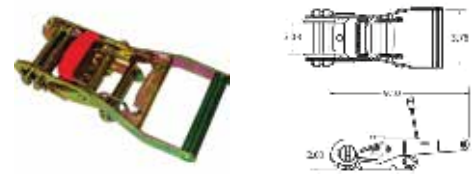


47105-11
2" Ratchet Buckle
3,666 lbs WLL (1,666 kg)
• Short wide handle

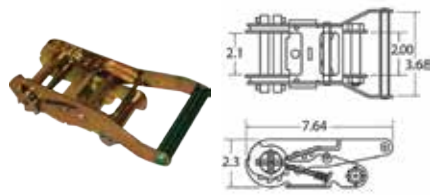

48965-10
3" Ratchet Buckle
7,333 lbs WLL (3,333 kg)
• Long handle

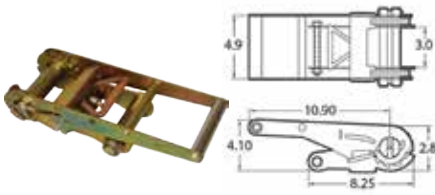

49349-10
4" Ratchet Buckle
8,000 lbs WLL (3,636 kg)
• Standard handle

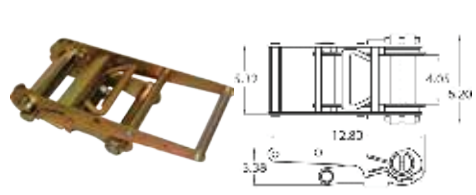

BUCKLES & WEBBING

Cam & Specialty Buckles


41030-12
1" Cam Buckle
166 lbs WLL (75 kg)




42195-11
1" Cam Buckle
500 lbs WLL (227 kg)




40880-22
1" Cam Buckle
600 lbs WLL (272 kg)

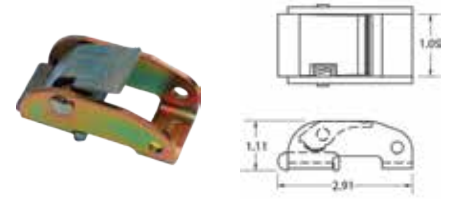


40880-15
2" Cam Buckle
833 lbs WLL (378 kg)

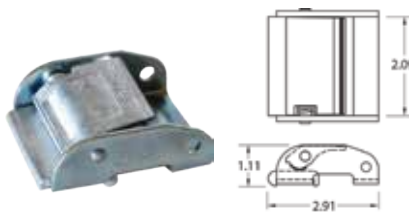

41645-10
Roller Buckle
500 lbs WLL (227 kg)

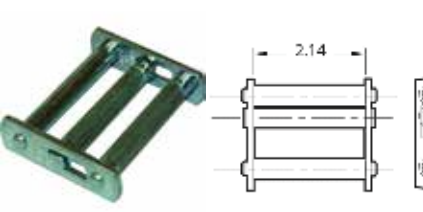

44639-12
1-3/4" Overcenter Buckle
1,666 lbs WLL (757 kg)
• One piece steel frame

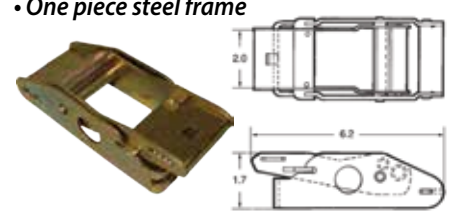

Webbing

Along with exceptional quality, Ancra's broad line of webbing gives you a range of choices to match your application. Custom made according to our strict specifications, Ancra webbing is treated for extra strength and durability, offering additional flexibility and ease of use.



Width		Breaking Strength Capacity		Type	Standard Color	Part Number
in.	mm.	lbs.	kg.			
1.00	25	4,500	2,045	Nylon	■ Red ■ Blue ■ Black	41820-10-RL 41820-14-RL 41820-15-RL
2.00	50	6,000	2,727	Polyester	■ Yellow	47200-61-BULK-CUT
2.00	50	6,000	2,727	Polyester	■ Gray	47200-60-BULK-CUT
2.00	50	6,000	2,727	Polyester	■ Blue ■ Red	47200-62-BULK-CUT 47200-64-BULK-CUT
2.00	50	12,000	5,454	Polyester, Latex Treated	■ Blue ■ Yellow ■ Red	41632-26-BULK-CUT 41632-31-BULK-CUT 41632-19-BULK-CUT
3.00	75	18,000	8,181	Polyester, Latex Treated	■ Yellow ■ Blue	41632-17-BULK-CUT 41632-24-BULK-CUT
4.00	100	20,000	9,090	Polyester, Latex Treated	■ Gray ■ Blue ■ Red ■ Yellow ■ Green	43797-18-BULK-CUT 43797-19-BULK-CUT 43797-23-BULK-CUT 43797-36-RL 43797-34-BULK-CUT

Webbing will have a longer life if stored in a dry, dark location. Continuous exposure to ultra-violet light can degrade the strength of synthetic webbing.